



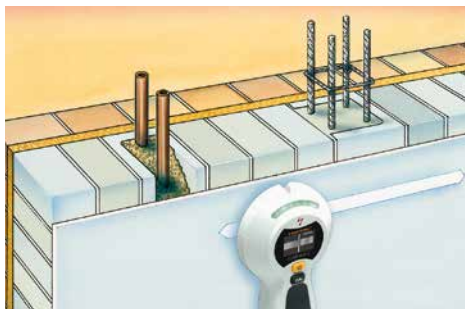

Elektronisk detektor til metal og levende ledninger


Rev.1216

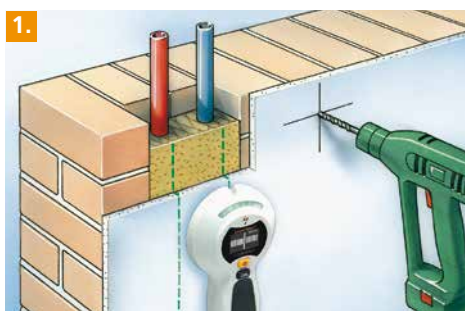

- Denne enhed tillader målrettet scanning efter metaller såsom armeringsjern, varmeledninger og vandrør.
- Betjening med en knap for at skifte mellem forskellige målemetoder
- Brugervejledningen på LC-displayet gør enheden let og pålideligt at bruge.
- Auto-kalibrering: justerer enheden til forskellige overflader umiddelbart efter tænding.
- Auto-Cal Plus: gør det let at lokalisere objekter i Metal-Scan-tilstand.
- Akustiske og visuelle detektionssignaler til at finde objekter.
- Høj sikkerhed garanteres af det permanente voltagwarefunktion.
- Placeringen af strømkabler og ledninger kan være præcist bestemt.

TEKNISK DATA

DETECTION OMRÅDE AC 110 - 230V, 50 - 60 Hz
DRIFTEMPERATUR 0°C...40°C
OPBEVARINGSTEMPERATUR -20°C ... 70°C
POWER SUPPLY 1 x 9V alkali battery (type 6LR 61)
DIMENSION (W x H x D) 85 x 180 x 38 mm
VÆGT (incl. batteri) 180 g

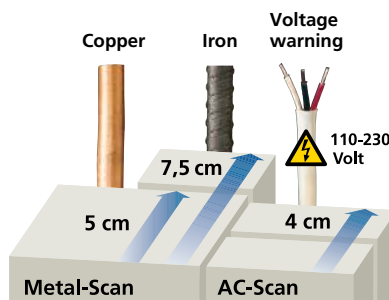

CombiFinder Plus
+ battery

Packing dimension (W x H x D)
313 x 123 x 60 mm

OVERVIEW

1 Targeted metal location: Ferro-Scan/ Non-Ferro-Scan (Metal-Scan)	Up to 7,5 cm / up to 5 cm depth
2 Targeted location of live supply lines (AC-Scan)	Up to 4 cm depth
Automatic calibration	Yes
Permanent voltage warning	Yes
Display	Illuminated LC-display
Detection and warning information	Visual and audible

ARTICLE	ARTICLE NO	EAN-CODE	PU
CombiFinder Plus	080.955A	4 021563 684199	5

