



Laserliner®

DampMaster Compact

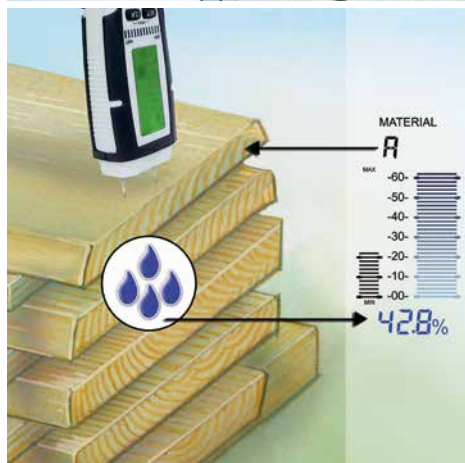

PROFESSIONEL FUGTMÅLER TIL TRÆ OG BYGGEMATERIALER

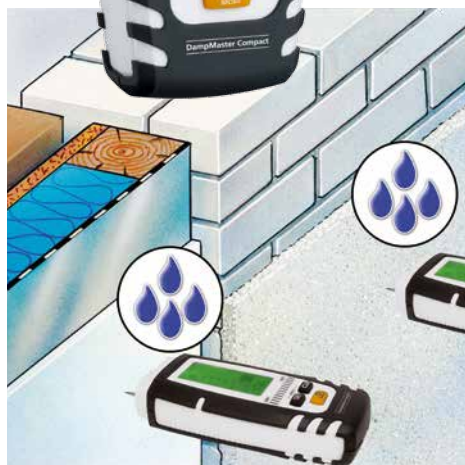

Stort oplyst display

Beskyttelseshætte inkl. selv test

- **Professional moisture measuring device** for wood and building moisture.
- **Material groups:** selection of various wood and building materials enables material-specific measurements while increasing measuring accuracy.
- **All measurement results at a glance:** all relevant information (material, measurement value, bar display, MIN/MAX) is visible simultaneously on the large, illuminated LC display.
- **LED wet/dry indicator:** 12 colour LEDs (green = dry, yellow = moist, red = wet) provide immediate measurement results for moisture content in the tested material.
- **Quick localisation of moisture:** comparison measurements can be made in **Index mode** which reveal increasing or decreasing moisture based on a neutral scale.
- **Stable, ergonomically designed, rubberised casing**
- **Automatic/Manual temperature compensation:** Measuring device adapted to temperature of material to be measured
- **LCD backlight:** adjustable LCD illumination
- **Self-test function:** A reference measurement in the protective cap verifies the accuracy of the measuring device.
- **Measuring spikes can be replaced**
- **Auto power off**
- Display of measurement value selectable for °C or °F.

TEKNISK DATA

MÅLE PRINCIP Modstands måling ved hjælp af integrerede elektroder
OMRÅDER 3 trægrupper 8 byggematerialegrupper 23 Indeks målegrupper Test område
MÅLEOMRÅDE Anhydrite Gulv: 0...29.5% Beton C12/15: 0.7...3.3% Beton C20/25: 1.1...3.9% Beton C30/37: 1.4...3.7% Gips: 0.1...38.2% kalksandsten: 0.5...18.7% betongulv: 2.0...171.2% Cementgulv: 1.0...4.5% Træ: 2.2...91.6%
NØJAGTIGHED Træ: ± 0.3% slutværdien ± 5 digits / Byggematerialer: ± 0,5% slutværdien ± 1 digit
ARBEJDSTEMPERATUR 0 ... 40°C, 85%rH, max højde 2000 m
OPBEVARINGSTEMPERATUR -10 ... 60°C, 85%rH
STRØMKILDE Batterier, 4x 1.5 V type AAA
VÆGT 186 g
MÅL (W x H x D) 58 mm x 155 mm x 38 mm



DampMaster Compact

Inkl. transportkuffert
+ batterier
+ Beskyttelseshætte inkl. selv test

Pakke dimension (W x H x D)
155 x 265 x 81 mm

ARTICLE	ARTICLE NO	EAN-CODE	PU
DampMaster Compact	49-082320	4 021563 694433	5

4x
AAA

HARD